

## EDENSTONE MASONRY NQ PRECAST CONCRETE WALKING TRAIL STEPS



### Features:

Step colour can be matched to suit site specific colours.  
For example, to match site rock that may be used in conjunction with the steps.

Steps have an R10 ligature inserted during manufacture for added strength.

Steps are available in two sizes, 1200Wx170Hx400D and 900Wx170Hx400D.


Steps are designed with a recess on the top edge to accommodate the following step creating a stable platform.




---

**EDENSTONE MASONRY NQ  
PRECAST CONCRETE WALKING TRAIL STEPS**


900mm STEP 3D VIEW

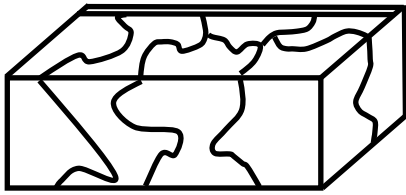




1200mm STEP 3D VIEW

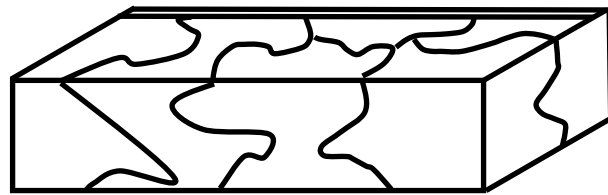

900mm STEP SECTION

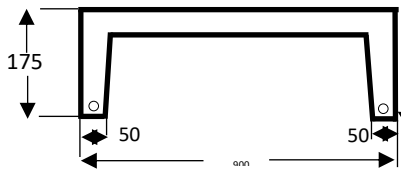

1200mm STEP SECTION

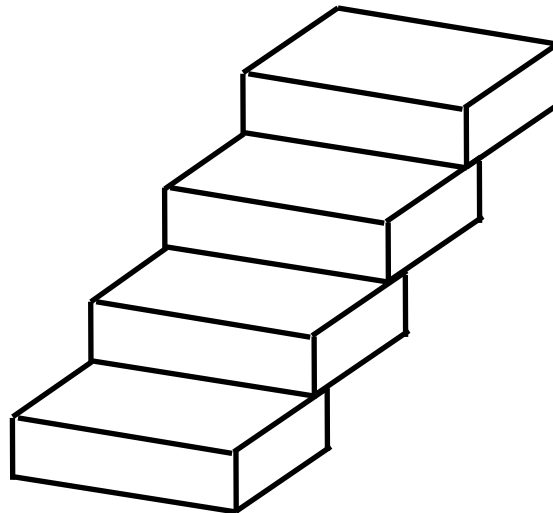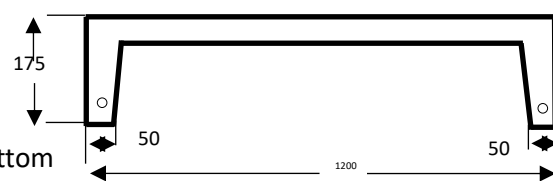

## **EDENSTONE MASONRY NQ PRECAST CONCRETE WALKING TRAIL STEPS**

### **Technical details**

**Size:** 900mm x 170mm x 400mm and 1200mm x 170mm x 400mm

**Weight:** 900mm - 95kg per step. 1200mm – 105kg per step. Weight can vary +/- 3 kg

**Concrete:** Guaranteed 40MPA at 28 days. Cylinder crack test results can be provided however 2 weeks' notice is required prior to manufacture.

**Colouring:** The colour is integral, ie it is consistent through the entire thickness of concrete.

Furthermore, Edenstone Masonry NQ can manufacture pre cast steps in any natural rock colour as required by the client.

**Reinforcing:** R10 steel ligature. Approx 50mm above the base of the step.

**Surface Finish:** Non slip, natural stone texture. Similar to “rough broom” concrete finish.



**Edenstone Precast Concrete Steps**

**Walking Track – Elliott Springs Walking Track - Townsville.**

